



instrument manifolds in AISI316

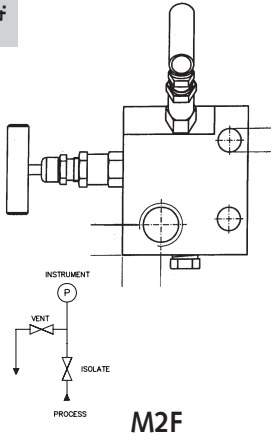

Model	Inlet (process)	Outlet (instrument)
With HS stem	Horizontal front side	Backside
M2F	1/2" NPT female (1x)	Flanged DIN19213 (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At bottom side	
Venting bonnet	At left side	
Isolating bonnet	Angular at top side	
Equalizing bonnet	Not	
Bracket holes	Yes	

Options: ■ materials such as Monel, Duplex, steel available on request


- stem type SO
- up to 700 bar
- anti tamper facility with removable key

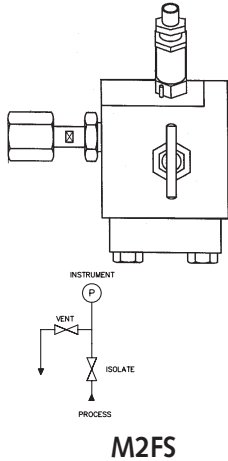

Model	Inlet (process)	Outlet (instrument)
With HS stem	Horizontal back side	Horizontal left side
M2FS	1/2" NPT female (1x)	1/2" BSP or NPT female (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At back side	
Venting bonnet	Angular at top side	
Isolating bonnet	At front side	
Equalizing bonnet	Not	
Bracket holes	Not	

Options: ■ materials such as Monel, Duplex, steel available on request

- stem type SO
- up to 700 bar
- anti tamper facility with removable key

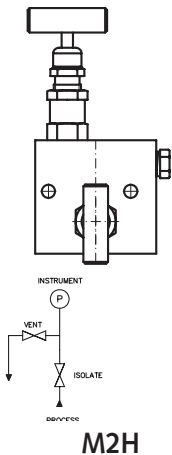

Model	Inlet (process)	Outlet (instrument)
With HS stem	Horizontal left side	Horizontal right side
M2H	1/2" NPT female (1x)	1/2" NPT female (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At right side (plugged)	
Venting bonnet	At top side	
Isolating bonnet	At front side	
Equalizing bonnet	Not	
Bracket holes	Yes	


Options: ■ materials such as Monel, Duplex, steel available on request

- stem type SO
- up to 700 bar
- anti tamper facility with removable key

Model	Inlet (process)	Outlet (instrument)
With HS stem	Front side	Backside
M2K	Flanged DIN19213 (1x)	Flanged DIN19213 (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At front side	
Venting bonnet	At right side	
Isolating bonnet	At top side	
Equalizing bonnet	Not	
Bracket holes	Not	

Options: ■ materials such as Monel, Duplex, steel available on request


- stem type SO
- up to 700 bar
- anti tamper facility with removable key

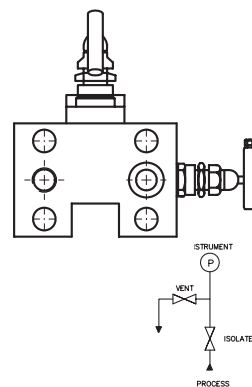
M2K

Model	Inlet (process)	Outlet (instrument)
With HS stem	Front side	Top side
M2R	1/4" BSP female (1x)	1/2" BSP or NPT male (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At front side	
Venting bonnet	At left side	
Isolating bonnet	At right side	
Equalizing bonnet	Not	
Bracket holes	Not	

Options: ■ materials such as Monel, Duplex, steel available on request


- stem type SO
- up to 700 bar
- anti tamper facility with removable key


M2R



Model	Inlet (process)	Outlet (instrument)
With HS stem	Front side	Top side
M2RM	1/4" BSP female (1x)	1/2" NPT female (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At front side	
Venting bonnet	At left side	
Isolating bonnet	At right side	
Equalizing bonnet	Not	
Bracket holes	Not	

Options: ■ materials such as Monel, Duplex, steel available on request

- stem type SO
- up to 700 bar
- anti tamper facility with removable key




M2RM

instrument manifolds in AISI316





Model	Inlet (process)	Outlet (instrument)
With HS stem	Bottom side	Top side
M2S	1/2" NPT female (1x)	1/2" NPT female (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At front side (plugged)	
Venting bonnet	At left side	
Isolating bonnet	At right side	
Equalizing bonnet	Not	
Bracket holes	Not	

- Options: ■ materials such as Monel, Duplex, steel available on request
 ■ stem type SO
 ■ up to 700 bar
 ■ anti tamper facility with removable key



Model	Inlet (process)	Outlet (instrument)
With HS stem	Bottom side	Top side
M2T	1/2" NPT male (1x)	1/2" NPT female (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At front side	
Venting bonnet	At right side	
Isolating bonnet	At left side	
Equalizing bonnet	Not	
Bracket holes	Not	

- Options: ■ materials such as Monel, Duplex, steel available on request
 ■ stem type SO
 ■ up to 700 bar
 ■ anti tamper facility with removable key



Model	Inlet (process)	Outlet (instrument)
With HS stem	Bottom side	Top side
M2TF	1/2" NPT female (1x)	1/2" NPT male (1x)
Standard specifications		
Pressure	420 bar	
Vent/test connection	At front side	
Venting bonnet	At right side	
Isolating bonnet	At left side	
Equalizing bonnet	Not	
Bracket holes	Not	

- Options: ■ materials such as Monel, Duplex, steel available on request
 ■ stem type SO
 ■ up to 700 bar
 ■ anti tamper facility with removable key